




# CTC09-49 Series



**Test Circuit**

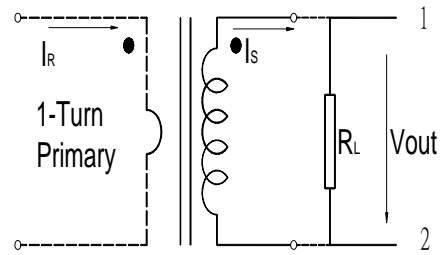

Electrical Characteristic										Mechanical Dimension				
Part No.	I <sub>R</sub> (A)	V <sub>out</sub> (V)	Acc.Class (%)	I <sub>min</sub> (A)	I <sub>max</sub> (A)	R <sub>L</sub> (Ω)	f (%)	δ ( ' )	DCR (Ω)	A(max)	B(max)	C(max)	D(±3)	E(±1)
										mm / inch				
CTC09-49-101-11P	0.05~100	3.998	0.2	0.05	200	100	-0.137	2.3	38	49.05 1.931	19.5 0.77	20.05 0.79	310 12.20	5.0 0.20

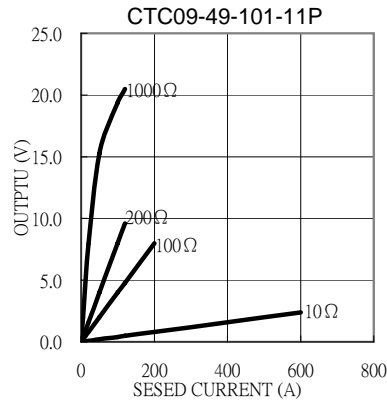

**Definition:**

- I<sub>R</sub> : Rated Current
- V<sub>out</sub>: Output voltage.
- Acc.Class: Accuracy class.
- I<sub>min</sub>: Min. detecting current which remains lineality.
- I<sub>max</sub>: Max. detecting current which remains lineality.
- R<sub>L</sub> : Load resistance.
- f(%): Ratio error.
- δ( ' ): Phase shift.
- DCR: Sendary Winding DC Resistance.

**Remark:**

1. Frequency band :50Hz~60Hz.
2. Operating temperature: -25°C~80°C.
3. All current ,voltage refer to rms value.
4. RoHS compliant.
5. Hi-Pot: 2500V<sub>RMS</sub>/1min between windings.
6. Formula of 2nd output :Vout=I<sub>R</sub>\*R<sub>L</sub> / N(Turns).
7. Product parts meet UL requirements.